

**Product: 850mm x 1300mm LED Edgelight window panel**



**Product box contents**

- 1 - 850x1300x45mm LED Edgelight Fake window + image
- 2 - MEANWELL (Necessary Amper) internal power supply (100-240V AC input power supply)
- 3 - 12-24V Dimmer with remote control (optional)
- 4 - Connected plug cable/cables for US / EU standards
- 5 - Installation Guide and mounting screws

**Illumination**


Luminance on backlight	4000 Lux
Uniformity	70%
Source Type	SMD LED
Lens Type	30° Acute angle
Number of light sources	44 SMD
LED Serial / parallel	1 / 44
Illumination power	130Lm/W
Color temperature	6500K
CRI (color rendering index)	87
LED supplier	SAMSUNG
Expected lifetime	50.000h
Loss of light after expected life	15%

**Packing**

LxWxH	15x15x134cm/pcs
Weight	550gr/pcs

**Electrical**

Operating voltage (Input)	12V - 5,5 A
Recommended power source	12V 8,5A (typical) Constant V.
Power consumption	65W
Operating temperature	-20C° / +50C°
Storage temperature	-40C° / +50C°
CE conformity	Declared
Class	0 No risk
Input Cable	US / US standards
Input voltage	100-240V AC

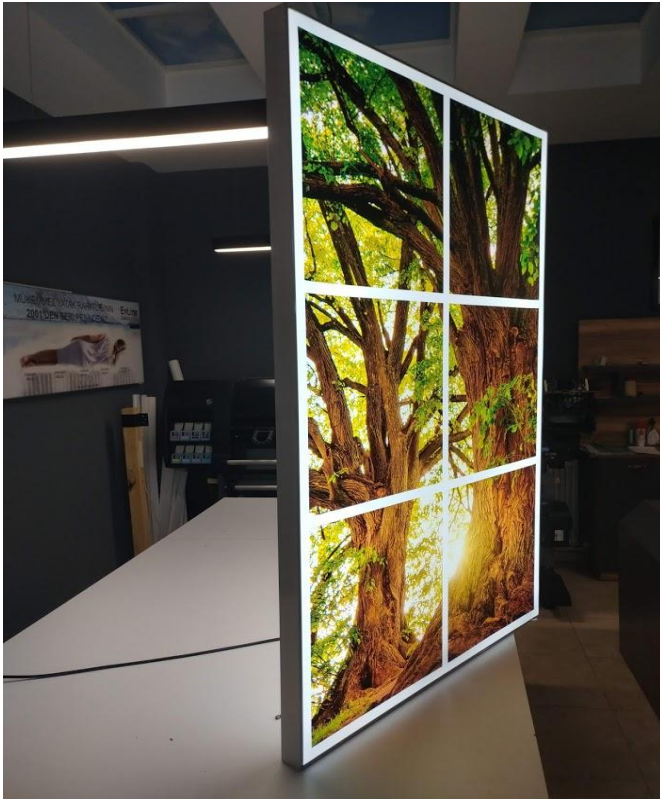

**Structural features**

LxWxH (total)	850x45x1300mm
Visible light measure	850x1300mm
Housing	Aluminium
Paint	Electrostatic coating
Backlit image	Vivid color fabric
Weight	4000gr

**Warranty**

Our company's general warranty conditions apply. (3 yesars)  
Please check for detailed information;

<https://www.proskypanels.com/terms-and-conditions/>